



HIGH PERFORMANCE
LUBRICANTS & GREASES — *with* —
NA-LUBE[®] KR

Alkylated Naphthalenes

INSIDE NA-LUBE® KR

The **NA-LUBE® KR Series** are synthetic alkylated naphthalene fluids offered in a wide range of viscosities. They are designed to enhance Group II, Group III, or PAO base oils in lubricant formulations. By doing so, they provide superior thermal and hydrolytic stability, greater film thickness, and compatibility with a broad range of base oils and additives.

In practice, alkylated naphthalenes are most often incorporated where additional benefits are needed to strengthen the overall formulation. They play a valuable role in helping lubricants meet the increasingly demanding requirements of modern applications, where traditional base oils may fall short.

Through the use of our proprietary processing technology, NA-LUBE® KR has emerged as a reliable performance-boosting base oil solution. It offers formulators the flexibility to design lubricants that not only address today's demanding requirements but also maintain durability and consistency across a wide range of operating conditions.

ADVANTAGES:

- *Superior Thermal Stability*
- *Hydrolytic Stability*
- *Additive Compatibility*
- *Excellent Oxidation Resistance*
- *Wide Viscosity Range*
- *Specialty Grades*

LEARN
MORE:



SUSTAINABLE SELECTIONS

Select **NA-LUBE® KR** grades are **LuSC-listed**, meeting the criteria of the EU Ecolabel for lubricants and greases. This allows formulators to achieve performance targets while supporting sustainability goals.

LuSC-listed Approvals for EU Ecolabel



For over 50 years, King Industries Inc. has been a leader in the alkylation of naphthalenes. Today, King is the producer of the world's broadest line of alkylated naphthalene synthetic fluids for lubricants. Designated the **NA-LUBE® KR** Series, these products are the ideal choice as base stocks or co-base stocks for high performance applications.

Whether working to develop an innovative new product or to improve an existing product, NA-LUBE KR alkylated naphthalenes can help formulators meet the ever-increasing demands placed on today's lubricants and greases. They provide superior thermo-oxidative stability, excellent hydrolytic stability, and greater film thickness compared to alternative base fluids.

King offers three **NSF HX-1** registered products that meet the requirements for incidental food contact as prescribed by FDA 21 CFR 178.3570 - **NA-LUBE KR-006FG, KR-015FG** and **KR-029FG**.

Synthetic Base Oils

Base Oil Modifiers

Specialty Additives

Halal & Kosher
Approvals

HX-1
Approvals
For incidental food contact

LuSC-listed
For EU Ecolabel

NA-LUBE KR Series Products - Typical Properties

NA-LUBE	Viscosity @ 40°C ASTM D445	Viscosity @ 100°C ASTM D445	Viscosity Index Calculated	Aniline Point ASTM D611	Noack Volatility CEC L40 ASTM D6375	Pour Point ASTM D97	Flash Point ASTM D92
KR-008	35 cSt	5.3 cSt	75	42°C	12 wt%	-33°C	224°C
KR-015	119 cSt	12.8 cSt	100	94°C	2.2 wt%	-39°C	260°C
KR-019	175 cSt	18.2 cSt	115	103°C	1.4 wt%	-26°C	290°C
KR-023	197 cSt	20 cSt	118	103°C	<1.0 wt%	-21°C	304°C
KR-006FG	35 cSt	5.3 cSt	75	42°C	12 wt%	-33°C	224°C
KR-015FG	119 cSt	12.8 cSt	100	94°C	2.2 wt%	-39°C	260°C
KR-029FG	175 cSt	18.2 cSt	115	103°C	1.4 wt%	-26°C	290°C

NA-LUBE® KR Series alkylated naphthalenes are high performance, synthetic base stocks that are used primarily to boost performance and to overcome deficiencies associated with other synthetic base oils or Group II & III mineral oils. Benefits of NA-LUBE KR products include:



-  Improved thermal & thermo-oxidative stability
-  Excellent varnish control
-  Improved solvency and dispersancy
-  Improved system cleanliness
-  Improved seal swell
-  Excellent hydrolytic stability
-  No surface competition with additives
-  Increased service life

	<i>Applications</i>	<i>Benefits of using NA-LUBE KR</i>
Lower Viscosity Grades (4-14 cSt @ 100°C)	Automotive Engine and Transmission Oils	Imparts excellent thermal and oxidative stability. Excellent varnish control.
		Provides excellent hydrolytic stability.
		Improves additive solubility and enhances additive performance.
		Imparts enhanced film flexibility, toughness, chemical resistance and detergent resistance.
	Compressor Oils Hydraulic Oils R&O & Turbine Oils	Boosts thermal and oxidative stability.
		Imparts seal swell.
Higher Viscosity Grades (14-20 cSt @ 100°C)	Industrial Gear Oils	Improves additive response.
		Results in good film thickness and film strength to reduce friction.
		Imparts excellent thermal and oxidative stability.
	Windmill Oils	Imparts seal swell.
		Increases cleanliness and service life.
		Provides excellent hydrolytic stability.
	High Temperature Oven and Chain Lubes	Results in good film thickness and film strength to reduce friction.
		Imparts excellent thermal and oxidative stability.
		Reduces volatility.
	Greases	Inhibits varnish formation and prevents lubricant failure (flaking).
		Requires less thickener in lithium greases, improving low temperature properties.
		Results in superior thermo-oxidative stability.
		Acts as a bridging solvent, reducing opaqueness.
		Acts as a highly effective dispersant, producing a smooth grease.


Panel Coker - Federal Test Method 791-3462 - In this test, a sample of oil is splashed against a test panel at an elevated temperature and the amount of coke deposited on the panel is determined by weight. Modifying a PAO fluid with 10% **NA-LUBE® KR-008, KR-015 or KR-019** significantly reduced the amount of coke formed.

Shown below, the neat PAO resulted in 9 mg of coke, while the PAO modified with NA-LUBE KR, resulted in significantly lower amounts of coke and cleaner panels.


Panel Coker (FTM 791-3462)

	100% PAO (ISO VG 220)	10% KR-008 90% PAO	10% KR-015 90% PAO	10% KR-019 90% PAO
Coking Value (mg)	9	1	3	2

Temperature Conditions: Test Panel (200°C), Oil Sample (140°C)



100% ISO VG 220 PAO



PAO + 10% **NA-LUBE KR-008**

Improved Oxidation Life and Reduced Sludge

The table below shows the benefits of using **NA-LUBE KR-008** to boost the RPVOT performance of a Group III oil containing 0.7% of an R&O package. **NA-LUBE BL-1208** is a multifunctional ashless R&O package also available from King Industries, Inc. Replacing 15% of the Group III oil with NA-LUBE KR-008 increased the RPVOT oxidation lifetime from 1339 to 1926 minutes. It also significantly reduced the sludge in the Cincinnati Milacron (CM) test.

	0.7% BL-1208 99.3% Group III	0.7% BL-1208 15.0% KR-008 84.3% Group III	Improvement
RPVOT (ASTM D2272) Lifetime (minutes)	1339	1926	+44%
CM Thermal Stability (ASTM D2070) Condition of Steel Rod: Color Condition of Copper Rod: Color Total Sludge (mg/100ml)	2 5 10.7	2 5 5.3	-49%

Thermal Stability


Federal Test Method 3411 - In this test, the samples are held at 274°C for 96 hours in the presence of a steel coupon, in a sealed glass tube, in the absence of moisture and oxygen. Measurements include the changes in viscosity and acid number, steel coupon weight loss and the appearance of the oil.

Using this test, a 7 cSt Group III base oil was compared to 20% modifications with **NA-LUBE® KR-015**, a TMP ester and a diester. The oil containing NA-LUBE KR-015 showed excellent performance, while the oils containing the esters resulted in thick, dark deposits, and in the case of the TMP ester, extensive degradation of the metal.




FTM 3411 - Thermal Stability and Corrosivity of Aircraft Turbine Engine Lubricants


274°C for 96 hours with steel coupon in sealed glass tube

	7 cSt Group III	20% KR-015 80% 7 cSt Group III	20% TMP Ester 80% 7 cSt Group III	20% Diester 80% 7 cSt Group III
Percent Change in Viscosity	0	0	-10.0	-15.8
Change in Acid Number (mg KOH/g)	0	0	6.0	0.5
Change in Metal Weight (mg/cm ²)	0	0	-3.0	0
Metal Appearance	Clean	Shiny	Etched	Etched / Black
Oil Appearance	Clean	Clear / Slight Amber	Very Dark Amber	Black
Test Cell Appearance	 Clean	 Clean	 Light Staining	 Heavy Black Stains

ASTM D6186 - This test measures the oxidation induction time (OIT) to an onset of an exotherm. The curves below show the improvement in the oxidative stability of a Group II base oil (ISO VG 46) when modified with 20% **NA-LUBE® KR-019**, **KR-015** or **KR-008**.

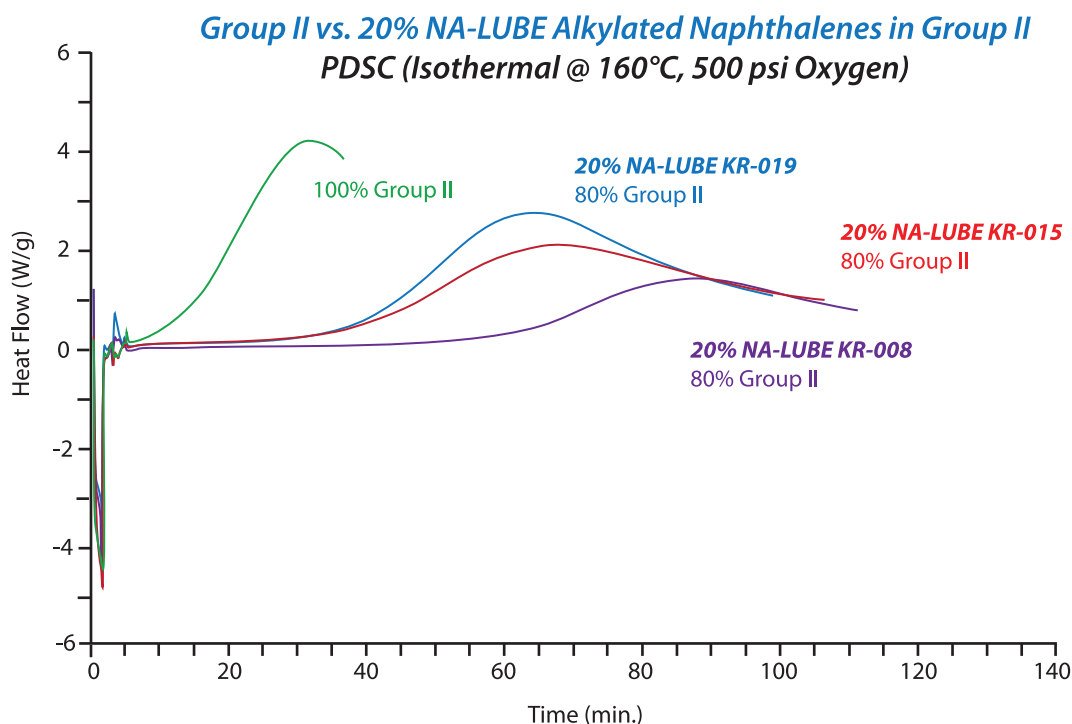

The curves below show the improvement in the oxidative stability at 170°C of a 6 cSt PAO when modified by 10% **NA-LUBE KR-008**. Also shown is the positive effect of adding 0.2% of an aminic antioxidant, **NA-LUBE AO-130**, to the blend.

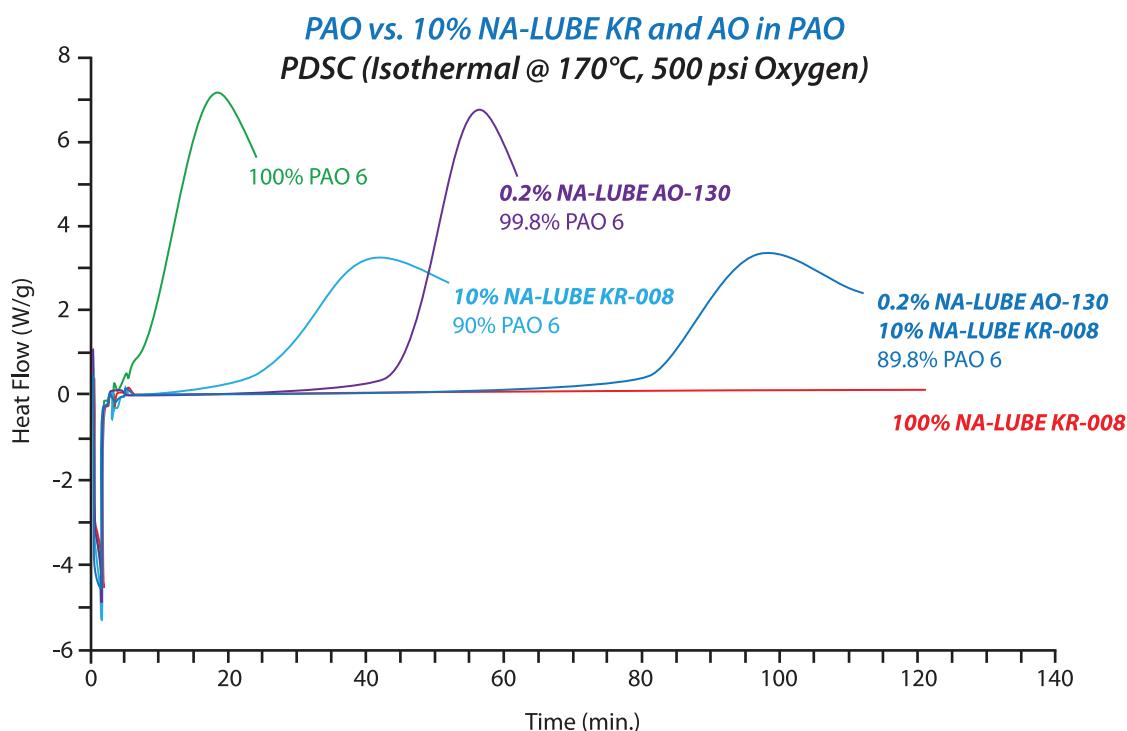


Seal Swell

Seal Swell - The addition of 20% **NA-LUBE® KR-015** to a 7 cSt Group III oil resulted in 2% seal swell.

 **Balanced polarity**

 **Imparts seal swell**

 **Effective in most rubber types**

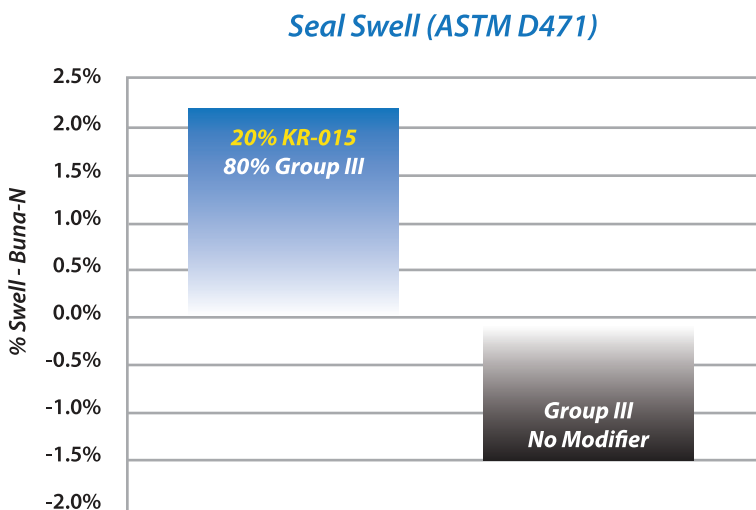

Thin Film Volatility

Thin Film Volatility - In this test, 2g of fluid was held in an aluminum pan for 24 hours at temperatures of 200°C, 225°C and 250°C. The table below shows that when 20% NA-LUBE KR-019 is added to a 40 cSt PAO, the volatility of the PAO containing fluid was significantly improved. For comparison, a diisotridecyl adipate ester at 20% in the PAO resulted in significantly higher volatility.

Thin Film Volatility (2 grams in aluminum pan for 24 hours)

	Weight Loss, %		
	200°C	225°C	250°C
PAO 40 cSt	17.9	29.8	45.4
NA-LUBE KR-019	8.5	19.7	41.6
20% Ester / 80% PAO	28.5	43.1	56.7
20% NA-LUBE KR-019 / 80% PAO	9.4	20.2	39.6

NA-LUBE® KR alkylated naphthalenes exhibit excellent performance properties when used as either the sole or co-base oil for grease applications.

The table below shows that **NA-LUBE KR-015** significantly reduces the amount of lithium soap required to prepare NLGI #2 lithium 12-hydroxystearate (Li-12-OH) greases, while imparting excellent performance properties.

NA-LUBE KR products impart similar performance when used in polyurea or aluminum complex greases. Data is available upon request.

NA-LUBE KR-015

Neat Grease Comparison



PAO 10 (89%)
Li-12-OH (11%)



KR-015 (93%)
Li-12-OH (7%)

Neat Base Oil Comparison in Lithium 12-OH Grease (NLGI#2)

	89% PAO 10 11% Li-12-OH	93% KR-015 7% Li-12-OH
P (60)	273	288
P (100K)	350	366
% Change	28	27
Oil Separation	4.1%	2.8%
Dropping Point	202°C	200°C
TGA	233°C	304°C

 Requires less thickener - improves low temperature properties

 Imparts superior thermo-oxidative stability


 Acts as a bridging solvent - reduces opaqueness

 Acts as a highly effective dispersant - produces a smooth grease

Thermo-oxidative Stability

PDSC - ASTM D5483

The PDSC curves on the right show the thermo-oxidative stability at 180°C of greases made with Group III oil and PAO as well as the improvements that can be gained by modifying the PAO grease with **NA-LUBE KR-015**.

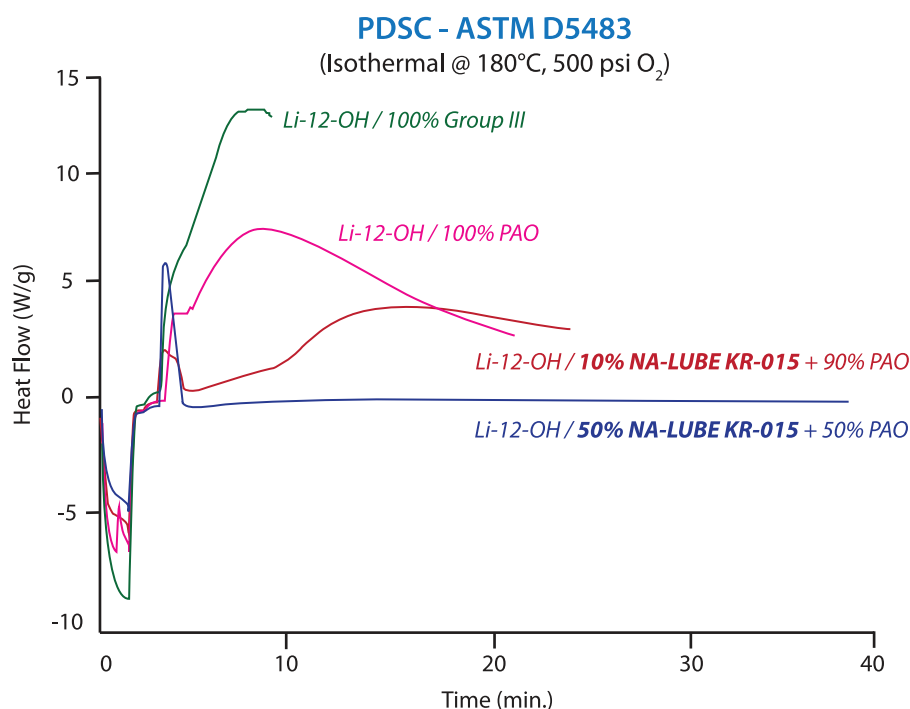

High Temperature Chain Lubricants

High temperature applications place severe demands on lubricating oils and additives. **NA-LUBE® KR** alkylated naphthalenes are especially suited to these applications. Low volatility and excellent thermo-oxidative stability are two of the attributes that help extend the functional life of high temperature lubricants.

 Lowers volatility to retain fluid longer - Noack 2% or less for **NA-LUBE KR-015** & **KR-019**


 Thermo-oxidative stability inhibits fluid degradation and varnish formation

High temperature chain lubrication is a prime example for the benefits of the **NA-LUBE KR** series. The following examples show the benefits of modifying a polyol ester with **NA-LUBE KR-019**.

The table below shows how the addition of 20% NA-LUBE KR-019 to a polyol ester chain lubricant can extend the functional life. After eight hours at 260°C, the polyol ester is a solid varnish. The sample modified with **NA-LUBE KR-019**, although darkened, remains fluid and functional.

NA-LUBE KR - High Temperature Performance

3 grams of fluid in aluminum pan for 8 hours @260°C

	Polyol Ester ISO VG 68	80% Polyol Ester ISO VG 68 20% KR-019
Original Weight (g)	3.0	3.0
Weight After 8 hours (g)	0.2	0.9
Evaporation Loss (%)	94%	70%
Appearance INITIAL		
Appearance AFTER 8 hours @ 260°C		
	Solid Varnish	Viscous Liquid 



The example below further demonstrates the benefits of **NA-LUBE® KR-019** in a chain lubricant fluid. The chain lubricant containing the polyol ester seized after 8 hours at 260°C. The fluid modified with **NA-LUBE KR-019** continues to lubricate post-bake.

NA-LUBE KR - High Temperature Performance
Extended Service Life of a NA-LUBE KR Modified POE

Color has
NO effect on
performance

100% Polyol Ester ISO VG 68



Solid Varnish



No Extension
Chain Seized

Coated and baked for 8 hours @260°C

Post-bake hanging performance

80% Polyol Ester ISO VG 68
20% KR-019



Dark Viscous Liquid



Full Extension - 2 sec.



Data Disclaimer

Properties presented in this brochure are averages derived from typically twenty production lots. Product properties are subject to normal manufacturing and testing tolerances. Further information can be obtained from the certificates of analysis for each product.

Contact Information

United States

World Headquarters
King Industries, Inc.
Science Road
Norwalk, CT 06852
USA

Phone: 203-866-5551

Email: lad@kingindustries.com

Europe

King Industries International
Dr. Dagmar Gartz
Science Park 402
1098 XH Amsterdam
The Netherlands

Phone: +31 20 723 1970

Email: dgartz@kingindustries.com

Asia / Pacific

China Sales Office

Dr. Hui Wang
Dalian Mingruida Technical Consulting Co., Ltd
Building 51, 20 Shuxiang Street
Dalian, China

Phone: 86-15941108485

Email: Hui.Wang@kingindustries.com



Specialty Chemicals

Since **1932**

www.KingIndustries.com

KI_0126-V1

The conditions of your use and application of our products, technical assistance and information (whether verbal, written or by way of product evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. Such testing has not necessarily been done by King Industries, Inc. ("King"). The facts, recommendations and suggestions herein stated are believed to be reliable; however, no guaranty or warranty of their accuracy is made. EXCEPT AS STATED, THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS OR OTHERWISE. KING SHALL NOT BE HELD LIABLE FOR SPECIAL, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES. Any statement inconsistent herewith is not authorized and shall not bind King. Nothing herein shall be construed as a recommendation to use any product(s) in conflict with patents covering any material or its use. No license is implied or granted under the claims of any patent. Sales or use of all products are pursuant to Standard Terms and Conditions stated in King sales documents.